

Mr. Issac Oved
NRG International
July 7, 1983
Page Two (2)

There are at present, major U.S. drilling companies who are writing their entire preventative maintenance programs and stacking programs around the AIC Lubricants. I am not in a position to name these companies at present, but will be glad to do so as soon as I have the written permission.


Please feel free to have your industrial accounts contact me if I can help them regarding the use of these special lubricants.

At present, Rust Power Systems is using the AIC line to give us the best protection possible where we are providing service and maintenance contracts pertaining to diesel and natural gas engines. In these applications, it is very important to reduce wear and down time as much as possible. The AIC line gives us a very decisive advantage and allows us the opportunity to demonstrate fuel efficiencies 6% to 8% better than standard 6.25 bore engines.

As a Caterpillar dealer, we are very concerned with using products which demonstrate the same quality as Caterpillar is famous for. I feel that the AIC line of products is one which fills the quality requirement and certainly performs when used as directed. Our two (2) years of research and commercial applications have given us confidence and knowledge to sell and apply these special lubricants to some of the largest U.S. industrial companies.

Enclosed you will find data pertaining to some of the work in which we have been involved.

Sincerely,



Ken Kendrick
Petroleum Sales

bg

Enclosures

Mr. Issac Oved
NRG International
July 7, 1983
Page Two (2)

There are at present, major U.S. drilling companies who are writing their entire preventative maintenance programs and stacking programs around the AIC Lubricants. I am not in a position to name these companies at present, but will be glad to do so as soon as I have the written permission.


Please feel free to have your industrial accounts contact me if I can help them regarding the use of these special lubricants.

At present, Rust Power Systems is using the AIC line to give us the best protection possible where we are providing service and maintenance contracts pertaining to diesel and natural gas engines. In these applications, it is very important to reduce wear and down time as much as possible. The AIC line gives us a very decisive advantage and allows us the opportunity to demonstrate fuel efficiencies 6% to 8% better than standard 6.25 bore engines.

As a Caterpillar dealer, we are very concerned with using products which demonstrate the same quality as Caterpillar is famous for. I feel that the AIC line of products is one which fills the quality requirement and certainly performs when used as directed. Our two (2) years of research and commercial applications have given us confidence and knowledge to sell and apply these special lubricants to some of the largest U.S. industrial companies.

Enclosed you will find data pertaining to some of the work in which we have been involved.

Sincerely,

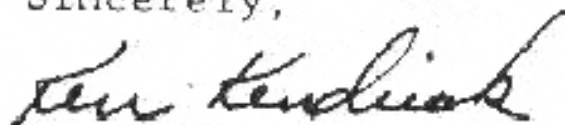

Ken Kendrick
Petroleum Sales

bg

Enclosures



February 22, 1982

ENGINE TEST REPORT

MANUFACTURER: Caterpillar MODEL: G-398 TA-HC
TEST MODE: Fuel consumption at Constant Speed/Load Design Condition
LOCATION: Rust Power Systems Facility, Albuquerque, New Mexico
APPLICATIONS: Deep Well Water Pump Driver, City of Los Alamos, New Mexico.
TEXT: This engine was new from factory test. Factory test had indicated a full speed/load fuel consumption within acceptable limits. (7597 BTU/BHP-HR @ 700 HP/1200 RPM, +/- 500 BTU/BHPHR)

Acceptable requirements for the applications included, demonstration of design BHP capability over a two hour period with fuel consumption during this run not to exceed a guaranteed value.

Acceptance test conditions were as follow:

SPEED:	1000 RPM	HORSE POWER:	584
ELEVATION:	5700 Ft. ASL	TEMPERATURE:	70 F
FUEL:	Commercial Natural Gas - 860 BTU/SCF-L.H.V.		

The engine was connected to a two-bearing generator and was loaded thru a fan-cooled resistor type load bank. The actual B-HP delivered was calculated thru conversion from warts of power delivered and generator efficiency factor.

The engine was started and run at design speed and approximately 25% load for eight hours. At the end of eight hours at low loaded the engine was brought to 100% of rated load and speed for ten hours. At this point engine speed and load were reduced to design conditions and fuel consumption data recorded over a two hour running period. The results were charted as line #1.

A certain amount of the crankcase oil was then removed and the sump was refilled with NRG 30P up to a volume percentage of 20%. The engine was again brought up to full rated speed and load for ten hours. After ten hours speed and load were reduced, to design conditions and fuel consumption data were taken over a four hour running period.

